

BESEN

EV WALLBOX




• Mode A: Charging Station with a Type 2 socket

Model: BS20-BA-3.6KW (16A 1phase)
BS20-BA-7.2KW (32A 1phase)
BS20-BA-11KW (16A 3phase)
BS20-BA-22KW (32A 3phase)

• Mode C: Charging Station with a 20 feet Type 1 /Type2 cable

Model: BS20-BC-3.6KW (16A 1phase)
BS20-BC-7.2KW (32A 1phase)
BS20-BC-11KW (16A 3phase)
BS20-BC-22KW (32A 3phase)




LCD



LED Flash



Button Switch



PC-ABS Material

This is a simple wallbox, which is divided into 2 kinds: ModeA and ModeC, depending on the way the EV is connected. It comes with a colorful LCD display that allows users to clearly see the current charging status including charging time, voltage, current internal temperature and etc.

It can automatically fix non-hardware faults that occur during charging. Faults that require manual repair will be displayed on the LCD screen. The housing is sturdy and has an IP66 rating.

It can be easily installed on the wall. If the customer prefers wallbox to be installed on the stand, we can provide the matching one.

The APP wallbox and the RFID wallbox appearing below are upgraded versions of this product, with the same consistent performance and installation method.

MODEL BS20

Input & Output

Input voltage/Output voltage	AC 230V/400V
Input frequency	47~63Hz
Max. output power	7.6KW(1 Phase)/22KW(3 Phase)
Max. output current	32A
Charging interface type	IEC 62196-2, SAE J1772

Protection

Over voltage protection	✓
Under voltage protection	✓
Over load protection	✓
Short circuit protection	✓
Earth leakage protection	✓
Over-temp protection	✓
Lightning protection	✓

Function and Accessory

Ethernet/WIFI/4G/Bluetooth	Optional
LCD	3.5-inch color display
RCD	Type A / type A+6mA DC
LED Indicator light	✓
Intelligent power adjustment	✓
RFID	Optional

Working environment

Protection degree	IP66
Environment temperature	-40 C ~ +75 C
Relative humidity	0-95% non-condensing
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumption	<8W

Mechanical

Dimension (W/H/D)	295/195/65mm
Weight	6KG~8KG

Mounting Accessories

Wall-mounting bracket	✓
Ground-mounting pole	Optional

Certificate

Certificate	CE, TUV, FCC, CSA, RoHS
-------------	-------------------------

BESEN

EV WALLBOX

APP version



Charging Time Setting

Freely set the charging time and duration



Firmware Update

Make app version upgrades



Charging History Record


Query charging history anytime, anywhere



Remote Control by APP

start or stop charging via Wifi or Bluetooth

User setting

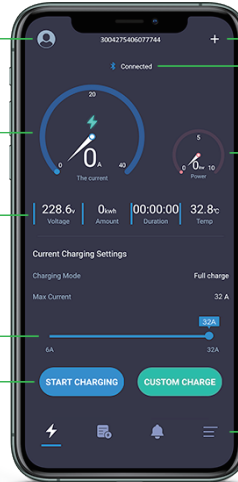

Add new device

Connection identifier, Bluetooth or Wifi

Electric current dashboard

Power dashboard

Charging parameters zone



Maximum charge current can be selected each time

Charging button

Home Record
Notification Settings

HISTORY RECORD

Check your charging history documents anytime

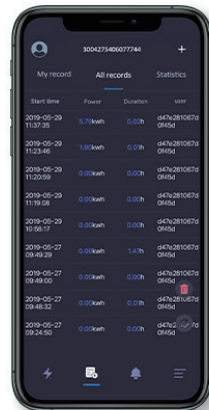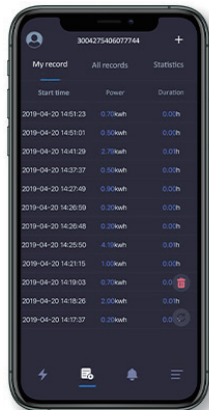

MODEL BS20-APP

Input & Output

Input voltage/Output voltage	AC 230V/400V
Input frequency	47~63Hz
Max. output power	7.6KW(1 Phase)/22KW(3 Phase)
Max. output current	32A
Charging interface type	IEC 62196-2, SAE J1772

Protection

Over voltage protection	✓
Under voltage protection	✓
Over load protection	✓
Short circuit protection	✓
Earth leakage protection	✓
Over-temp protection	✓
Lightning protection	✓

Function and Accessory

WiFi/Bluetooth	✓
LCD	3.5-inch color display
RCD	Type A / Type A+6mA DC
LED Indicator light	✓
Intelligent power adjustment	✓
RFID	Optional

Working environment

Protection degree	IP66
Environment temperature	-40 C ~ +75 C
Relative humidity	0-95% non-condensing
Maximum altitude	<2000m
Cooling	Natural air cooling
Standby power consumption	<8W

Mechanical

Dimension (W/H/D)	295/195/65mm
Weight	6KG~8KG

Mounting Accessories

Wall-mounting bracket	✓
Ground-mounting pole	Optional

Certificate

Certificate	CE, TUV, FCC, CSA, RoHS
-------------	-------------------------